



BRUTALLY EFFECTIVE



MANUFACTURED IN ENGLAND

Tree Surgeons • Land Clearance Contractors

Landscapers • Hire Companies

Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M


Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M

The KLG1-MC, KLG1-M and KLG2-M are professional log grabs, robustly constructed for use with mini skid steers and mini articulated loaders. The simple but extremely strong design ensures high reliability by minimising the number of moving parts. It is useful for a range of tasks including:

- Handling of large logs
- Loading of brush into woodchippers
- Handling of posts, telegraph poles and stakes

The high gripping power of the grab, combined with the rigid mounting system, prevents the load from swinging during transit, maximising operator control and safety.



Mini Skid-Steers



Sit-in Skid-Steers



Tractor Front-end
Loaders



Telehandlers



Mini Articulated
Loaders



Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M

Key Features



The large-bore ram maximises crushing power, and the pilot-operated check valve prevents the grab from opening without operator input, ensuring load retention.



The optional front-mounted tow-ball permits easy movement of trailers and trailed plant, without the need to change attachment.



The optional side-mounted capstan is a useful tie-point for ropes when dragging brush from hard-to-access areas.




The rear brace spreads forces evenly throughout the grab and carrier vehicle, and helps to prevent the load from shifting.



The hydraulic pipes are spiral-wrapped and routed through the centre of the grab, protecting them from scuff wear and catching on branches.



The practically unbreakable rigid swivel system prevents the load from swinging while in transit, maximising operator control and safety - particularly in confined spaces.

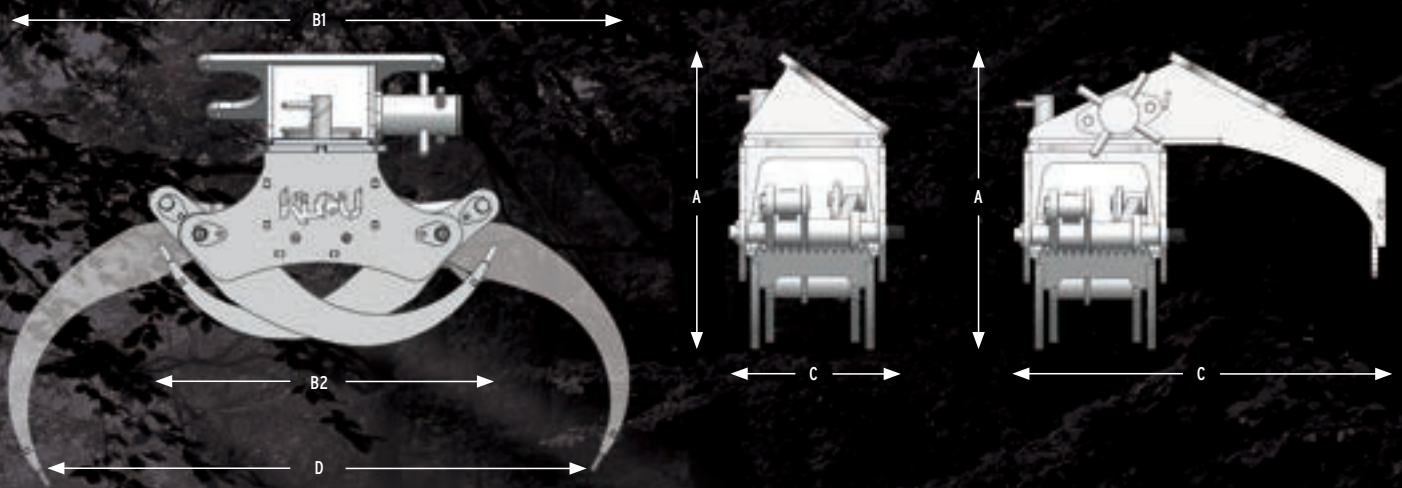

Dimensions (exc tool grip, capstan, tow-ball)	KLGI-MC	KLGI-M	KLGI-M
A - Overall height (mm)	505	520	730
B1 - Overall width - open (mm)	1105	1105	1370
B2 - Overall width - closed (mm)	625	625	800
C - Overall length (mm)	300	650	745
D - Max. open width (mm)	945	945	1160
E - Min. closed diameter (mm)	60	60	80
Max. log diameter (mm)	750	750	950
Overall weight (kg)	105	125	180

Hydraulic service requirements	KLGI-MC	KLGI-M	KLGI-M
Min/max flow (litres/min)	15/60	15/60	20/75
Min/max pressure (bar)	150/250	150/250	150/250
Case drain required?	No	No	No
Pressure free return line required	No	No	No

KLGI-MC does not have rear brace in order to reduce size for use with small loaders

Klou UK operates a policy of continuous development and improvement -
all specifications are therefore subject to change without notice

Review of the Klou Log Grab

"I just wanted to say how happy I am with the log grab for my mini skid-steer. I've used various loader grapples previously, some of which impressed and others which did not, but the Klou grapple is head and shoulders above anything I have used before. Your grapple has been beasted for 2 weeks now and it is hands down the best designed and fabricated attachment I've used. I keep finding new ways to use it - I feel real thought has gone into it. Time will tell with build quality - these things go through a lot, but so far it's been brilliant and looks and feels more like something I'd find on a timber crane on a forestry forwarder. The foresters have been impressed too - high praise indeed from those boys!"

Ben, Centaur Tree Services Ltd

Update - 3 years later - "Still going strong!" - **Ben**

Tel: 01202 517799 • sales@klouuk.com • www.klouuk.com

Klou UK • 17 Whittle Road • Ferndown Industrial Estate • Wimborne • BH21 7RL